

(19) World Intellectual Property Organization
International Bureau



10/506785



(43) International Publication Date
12 September 2003 (12.09.2003)

PCT

(10) International Publication Number
WO 03/074779 A1

(51) International Patent Classification⁷: D21B 1/12

(21) International Application Number: PCT/SE03/00358

(22) International Filing Date: 4 March 2003 (04.03.2003)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:
0200688-0 7 March 2002 (07.03.2002) SE

(71) Applicant and

(72) Inventor: OBITZ, Lars [SE/SE]; Isterberget 3, S-185 00
Vaxholm (SE).

(74) Agent: BERGENSTRÄHLE & LINDVALL AB; Box
17704, S-118 93 Stockholm (SE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SLUICE FEEDER

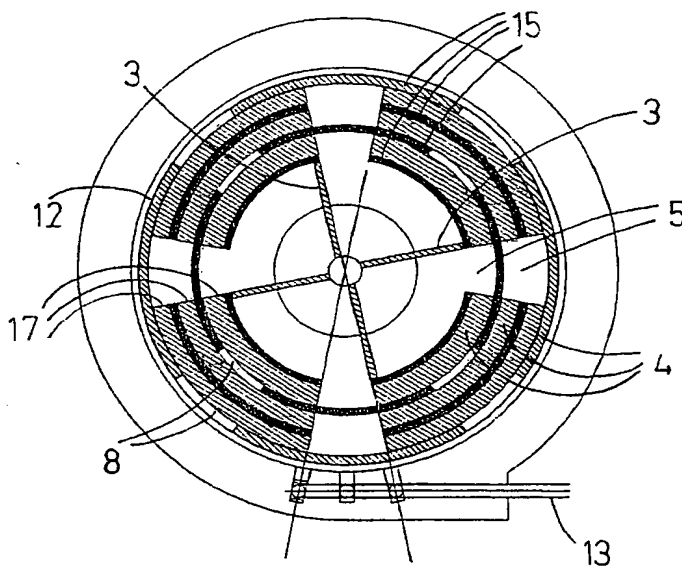

(57) Abstract: The invention concerns a sluice feeder comprising an inlet (1), an outlet (11), and a rotor (2), into which sluice feeder material to be fed from a first medium to a second medium sealed from the first medium is fed to the inlet (1). The inlet (1) is directed towards the centre portion of the rotor (2), the rotor (2) and a cooperating stator (7), respectively, show at least a radial opening (5, 8) each and are provided so that at least one pocket (9) is formed, which alternatingly opens and seals upon rotation of the rotor (2). The material is thrown radially outwards by the rotor (2) to the pocket (9) to finally be emptied from the pocket (9) to the outlet at the same time as the pocket (9) is sealed towards the inlet (1) by means of the stator (7).

BEST AVAILABLE COPY

WO 03/074779 A1